

# INTRODUCING, NEW

WILDE TOOL CO., INC.

ROLL SPRING PUNCHES

**PROMOTIONS**






	A	B	C	D
WILDE #	POINT SIZE	OAL +/- .005"	PIN LENGTH +/- .010"	Stock Size
RS 232.NP	1/16"	4.75	1.125	5/16"
RS 564.NP	5/64"	5.00	1.50	5/16"
RS 332.NP	3/32"	5.25	1.75	5/16"
RS 432.NP	1/8"	6.00	2.45	5/16"
RS 532.NP	5/32"	6.25	2.65	5/16"
RS 632.NP	3/16"	6.50	3.00	5/16"
RS 732.NP	7/32"	6.75	3.00	3/8"
RS 832.NP	1/4"	7.25	3.50	3/8"
RS1032.NP	5/16"	7.75	3.70	1/2"
RS1232.NP	3/8"	8.00	4.10	1/2"
RS1432.NP	7/16"	8.50	4.20	5/8"
RS1632.NP	1/2"	9.25	5.05	5/8"

**NEW RS936.NP COUNTER DISPLAY SET CONTAINING THREE OF EACH SIZE ROLL SPRING PUNCHES.**

**Call 800-255-7171 for pricing**

## ROLL SPRING PUNCHES:

- have a pilot point that fits into the hollow center of pin to help prevent damage to wall of hole or pin.
- are produced from High Carbon Molybdenum Tool Steel and properly heat treated.
- are hardened entire length with tempered striking end.
- are centerless ground for complete accuracy.
- incorporate a reverse taper from tip of punches to help prevent punch from sticking in the work piece.
- are manufactured with three identifying machine marks to help distinguish between regular pin punches.
- are manufactured from hex stock steel vs. round which helps stabilize punch from rolling away from user.
- manufactured from hex stock allow to brand product along length of tool for easier identification.

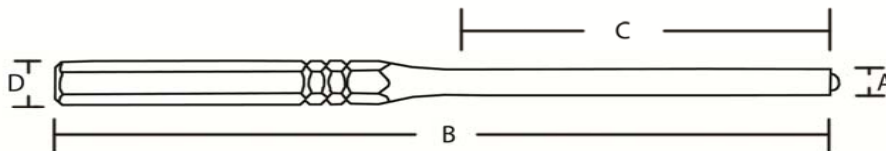

**Always wear safety goggles when using punches and chisels.**